



NCHRP Approved Test level 2 portable reinforced jersey barriers.

## SAFETY BARRIERS

Guardsafe™ model G6-350-TL2 type barriers are portable energy absorbing, crashworthy, water ballasted linear barrier system designed for use as a temporary barrier for highway workzones. The Guardsafe™ G6-350-TL2-3 model barrier is a fully tested, crashworthy vehicle deflection system that meets the structural adequacy, occupant risk, and vehicle trajectory criteria set forth in the National Cooperative Highway Research Program (NCHRP) Report 350. Guardsafe™ G6-350-TL2 barriers are structurally built to meet and exceed both NCHRP 350 TL-2 type test methods.

## TL2 APPROVED

### G6-350-TL2




Dimensions: 42 x 24 x 72 inches

Guardsafe™ G6-350-TL2 model barrier provides workzones with minimal deflection and barrier movement when subjected to high speed impacts.

G6-350-TL2 type barriers are delivered workzone ready without the need for any heavy equipment, to effect their installation.

Barriers easily interconnect with 4 attachment tubes that require fixation during setup. A period of approximately 4 minutes between each barrier completes setup.



Guardsafe™ G12-350 TL2 barriers are “single”, portable units that form a linear barrier wall when interlocked together.


#### Fill Port

Each barrier has a 6 inch removable fill cap with a 4 inch fill port.

#### Evacuation

Each barrier has a 2, 3 inch removable evacuation cap with a 2.5 inch discharge hole.

### IMPACT RESISTANCE

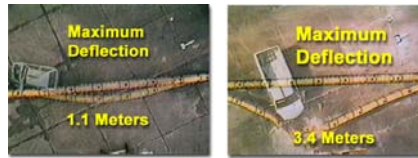

#### Deflection

G6-350-TL2 Barriers are designed with an inclined base similar to that of an actual “Concrete Jersey Barrier”. This inclined base helps redirect a vehicle back into its traveling direction, thereby resisting “pocketing”. The galvanized steel reinforcement cage prohibits a vehicle from passing over, through or underneath the barriers. Water ballasted barriers provide energy absorption capacity, thereby reducing a vehicle’s overall impact.

#### Maneuverability

Barriers are manufactured with fork lift openings, allowing for quick intervention regardless of them being empty or full.

### ABSORPTION BUMPERS



Extreme elements are equipped with two, 3 inch galvanized steel absorption bumper tubes that attach and interconnect with horizontal galvanized tubing with which the barrier is pre-equipped.

#### Equipped with Quick Cage reinforcement system.

G6-350-TL2 Barriers are equipped with a quick intervention system, allowing the reinforcement cages to be replaced if ever the barriers were subjected to minor impacts.

### INSTALLATION



Unload



Setup



Insert Tubes



Tighten

### SPECIFICATIONS

Height: 42 inches  
Length: 72 inches  
Width: 24 inches

Empty weight: 130 lbs  
With steel: 250 lbs  
Water filled: 1750 lbs



Part #	DESCRIPTION	COST
G6-350-TL2-0	Orange TL2-3 350 Barriers	\$Call
G6-350-TL2-W	White TL2-3 350 Barriers	\$Call
G6-350-2GSC	Galvanized steel cage	\$Call
G6-350-CS-18	Outer connecting sleeve 18inches	\$Call
G6-350-HEX-3	Hex fixation bolts	\$Call

Prices reflect single units only, please contact your sales representative for quantity pricing

WWW.USREFLECTOR.COM


# GUARDSAFE

## ANTI-TERRORISM / FORCE PROTECTION BARRIERS



US REFLECTOR proudly introduces its new line of Anti-Terrorism and Force Protection Barriers. We understand the need for immediate response to high threat situations and have engineered our products for rapid deployment with maximum protection.

GUARDSAFE Standard Barriers provide significant structural stability when ballasted and are compatible with your existing inventory.

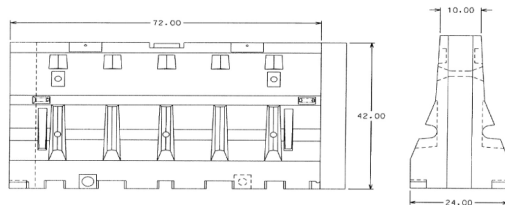

350 TL2 kit for maximum portable protection



### ADVANTAGES

- Recessed cap for easy stacking
- Molded in areas for warning lights
- Molded in holes for attaching signs/screen
- Indentations along flat side for reflective tape
- "Kiss throughs" not "Kiss offs" for structural strength
- "Kiss throughs" for bolting anti-terrorism/350 kit, for easy upgradeing
- Side baffels for additional structural integrity
- Additional "Kiss throughs" for added strength and upgrade installation
- Fork Lift ports for repositioning without draining
- Dual drain plugs for rapid repositioning
- HAND HOLDS for easy lifting
- 6" male/female interconnection compatible with Guardian inventory
- Turning radius of 15 degrees while connected Stackable 3 units high
- Molded from modified polyethylene resists ultraviolet degradation
- UV protectants added for long color life
- Pound for pound the best value for safety barriers today!!!

GUARDSAFE Anti-Intrusion Barriers, can be deployed either empty or ballasted. Ballasted GUARDSAFE Barriers with the optional interlocking TL2 kit, inhibit "push through" encroachment at the point of attack.

